


**PLAN**  
NTS

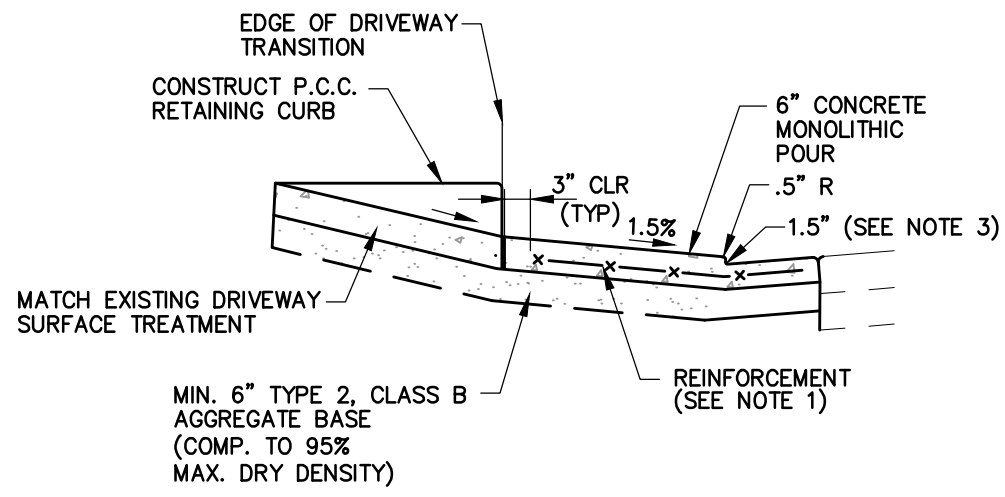

**SECTION A-A**  
NTS

**NOTES:**

1. COMMERCIAL DRIVEWAYS TO HAVE #4 REBAR AT 18 INCHES ON CENTER, EACH WAY EXTENDED INTO GUTTER PAN UNLESS OTHERWISE APPROVED BY THE CITY ENGINEER.
2. DRIVEWAY LANDING, SIDEWALK, CURB & GUTTER TO BE MONOLITHIC POUR TO A.C. LINE.
3. CURB HEIGHT AT LANDING SHALL BE 1 INCH MINIMUM AND 2 INCH MAXIMUM (3 INCH MAX UPON CARSON CITY PUBLIC WORKS APPROVAL) 2 INCH RADIUS TO BE USED WHEN CURB HEIGHT AT LANDING IS GREATER THAN 2 INCHES.
4. DRIVEWAY APRONS SHALL BE CONSTRUCTED IN COMPLIANCE WITH STANDARD DETAILS C-5.1.1 AND C-5.2.1.

NO.	REVISION	DATE	STANDARD DETAIL FOR PUBLIC WORKS CONSTRUCTION	SECTION
1	REBAR	9/17	<b>P.C.C. DRIVEWAY APRON TYPE 1</b>	CARSON CITY
				DRAWING NO. C-5.2.3
				DATE SEP 2017
APPROVED BY:		9/17		