


TYPICAL PROTECTION FOR INLET ON SUMP
NTS

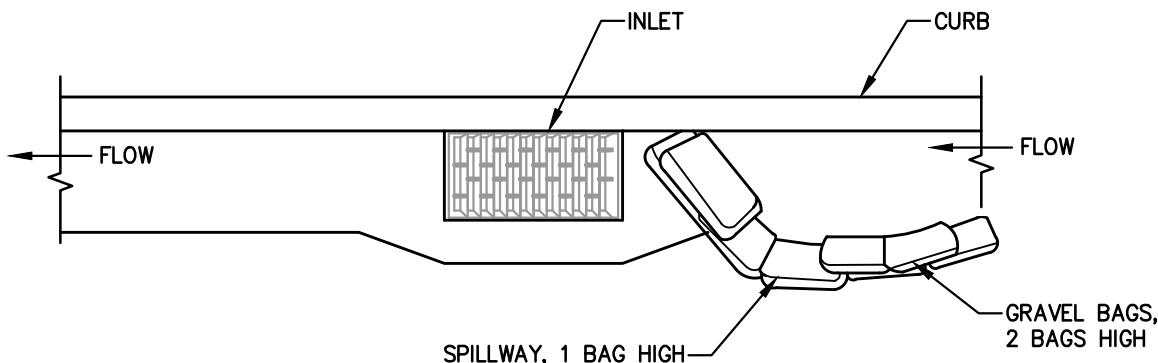

TYPICAL PROTECTION FOR INLET ON GRADE
NTS

NOTES: 1

1. SEE DRAWING C-4.2.1 FOR STORMWATER PROTECTION GENERAL NOTES.
2. STORM DRAIN INLET PROTECTION IS INTENDED FOR TEMPORARY SHORT-TERM USE.
3. THE CONTRACTOR SHALL INSPECT ALL INLET PROTECTION PER DRAWING C-4.2.1. DISTURBED OR BROKEN BAGS SHALL BE REPLACED. SEDIMENT AND DEBRIS SHALL BE REMOVED AND DISPOSED OF.
4. INLET PROTECTION MUST BE PROPERLY MAINTAINED WHILE IN PLACE AND REMOVED WHEN THE REQUIREMENTS OF THE NDEP CONSTRUCTION GENERAL PERMIT HAVE BEEN MET.
5. GRAVEL BAGS SHALL BE FILLED WITH 3/8" – 3/4" WASHED ROCK.
6. AFTER CONSTRUCTION WHEN GRAVEL BAGS ARE REMOVED, ALL CONSTRUCTION MATERIAL, DEBRIS, SEDIMENT, ETC SHALL BE REMOVED FROM INLETS AND CATCH BASINS.

NO.	REVISION	DATE	STANDARD DETAIL FOR PUBLIC WORKS CONSTRUCTION	SECTION
1	NOTES &	12/25	STORM DRAIN INLET PROTECTION	CARSON CITY
	RENUMBER			DRAWING NO. C-4.2.2 1
				DATE DEC 2025
APPROVED BY: <u>DA</u> 12/25				